

CHOICE

Technical information



Other documents available for this product

- User manual for CHOICE lockers with BP type lock
- User manual for CHOICE lockers with BS type lock
- User manual for CHOICE lockers with CS type locks
- User manual for CHOICE lockers with ES type lock
- User manual for CHOICE lockers with FS type lock

10 year Warranty

See Warranty statement



Technical information

Types

- Locker (1)
- Open wardrobe (2)
- Cabinet with 2 doors and a niche with fabric panels (3)

1



2



3



Locker (1)

Sides, top, bottom and back panel

- Sides, top and bottom - 18 mm MFC (melamine) with 1 mm ABS edging;
- Back panel - 18 mm MFC (melamine);
- Side walls have holes which can be hidden with plastic covers;
- Colour of the plastic covers matches the colour of the carcass.

Shelves

- 18 mm MFC (melamine) with 1 mm ABS edging;
- Load capacity - 20 kg.

Plastic legs

- Black plastic height levelling legs, H=17 mm +10 mm.

Plinth

- Made of 18 mm MFC (melamine) with 1 mm ABS edging, H= 100 mm;
- Height levelling legs +10 mm.

Doors

- Doors with hinges in 18 mm MFC (melamine) with 1 mm edging;
- Door with hinges in 18 mm veneer faced chipboard with 1,5 mm ABS edging;
- Doors with hinges in 17,5 - 18 mm HPL faced chipboard with 2 mm ABS edging;
- 107° opening angle with soft closing function.

Perforated metal sheet doors

- Frame - 20x20 mm welded metal tube;
- Door panel made of 1 mm metal sheet with Ø8 mm perforation;
- 95° opening angle with soft closing function;
- Powder coated metal.

Locks

- Cylinder lock with retention for personal use (AP);
- Combination lock for personal use (BP);
- Combination lock for shared use (BS);
- Electronic keypad lock for shared use (CS);
- Electronic touchscreen RFID/keypad lock for shared or personal use (ES)*
- Electronic hidden RFID lock for shared or personal use (FS);**

*Works with all MIFARE® Classic cards or MIFARE® Desfire Evo II cards.

** Works with all MIFARE® Classic (13,56 MHz) cards.

Open wardrobe (2)

Sides, top, bottom and back panel

- Sides, top and bottom - 18 mm MFC (melamine) with 1 mm ABS edging;
- Back panel - 18 mm MFC (melamine);
- Side walls will always have holes which can be hidden with plastic covers;
- Colour of the plastic covers matches the colour of carcass.

Shelves

- 18 mm MFC (melamine) with 1 mm ABS edging;
- Load capacity - 20 kg.

Metal hanging rail

- Coated in chrome.

Plastic legs

- Black plastic height levelling legs, H=17 mm +10 mm.

Plinth

- Made of 18 mm MFC (melamine) with 1 mm ABS edging, H= 100 mm;
- Height levelling legs +10 mm.

Cabinet with 2 doors and a niche with fabric panel (3)

Sides, top, bottom and back panel

- Sides, top and bottom - 18 mm MFC (melamine) with 1 mm ABS edging;
- Back panel - 18 mm MFC (melamine);
- Side walls will always have holes which can be hidden with plastic covers;
- Colour of the plastic covers matches the colour of the carcass.

Doors

- Doors with hinges in 18 mm MFC (melamine) with 1 mm;
- Door with hinges in 18 mm veneer faced chipboard with 1,5 mm ABS edging;
- Doors with hinges in 17,5 - 18 mm HPL faced chipboard with 2 mm ABS edging;
- 107° opening angle with soft closing function;
- Not designed to use on a daily basis.

Fabric panels

- Base 16mm MFC (melamine);
- 16 mm foam VB3842 (density: 36-39 kg/m³) (for sides, back and top);
- 60 mm foam VB3842 (density: 36-39 kg/m³) (for bottom);
- Upholstered with fabric.

Plastic legs

- Black plastic height levelling legs, H=17 mm +10 mm.

Plinth:

- Made of 18 mm MFC (melamine) with 1 mm ABS edging, H= 100 mm;
- Height levelling legs +10 mm.

Additional parts (optional)

Planter box (1)

- 16 mm MFC (melamine) with 1 mm ABS edging;
- Load capacity – 20 kg.

Top panels (2)

- 16 MFC (melamine) with 1 mm ABS edging;
- 17 mm chipboard, covered in wood veneer with 1,5 mm edging.

Hook for clothes (3)

- Made of 2 mm metal sheet;
- Powder coated metal;
- Dimensions: 20x28, H=62 mm.

Plexiglas name card holder (4)

- Adhesive organic glass inserts for name cards (90x60x1,5mm).

Metal shelves (5)

- Central metal shelf for letters (thickness 0,8 mm): external dimensions 380x316 mm, H=108 mm, internal dimensions 300x300 mm, H=100 mm;
- Right metal shelf (thickness 0,8 mm): external dimensions 340x316 mm, H=140 mm, internal dimensions 300x300 mm, H=100 mm;
- Powder coated metal.

Keys for AP lock (6)

- Master key – provides user access in case of lost user key;
- Removal key – used to remove cylinder lock in the case of changing lock;
- Cylinder lock – used to replace the old cylinder that requires change.

Keys for BP and BS locks (7)

- Master key – provides lock access in case of forgotten user code;
- Programming pin (only for BP version) – necessary to set the user code.

Master / Manager cards for ES and FS locks (8)

- Card for ES and FS locks – universal card that could be programmed as User card, Master card or Manager card. For more information, please check user manual.
- User card always included together with lock;
- Recommended 2 or 3 Master and Manager cards per office. Up to 3 Master and Manager cards may be registered to each lock.

Programming Key for CS locks (9)

- Registers Managers Bypass Keys;
- Provides lock access in case of forgotten user code;
- Allows management audit/inspection;
- 1 Programming Key required per lock system;
- Recommended one Programming key per office.

Manager Bypass Key for CS locks (10)

- Provides lock access in case of forgotten user code;
- Allows management audit/inspection;
- Provides external power in case of battery failure;
- Up to 25 Manager Bypass Keys may be registered per lock;
- Recommended: one or two Manager keys per office.

Stickers (11)

- For doors with FS locks;
- Transparent, matte black or white.



Range

Inner dimensions

W = 414 mm

D = 460 mm

H = 430 mm



Inner dimensions

W = 414 mm


D = 460 mm

H = 860 mm




Lockers


D = 500 mm

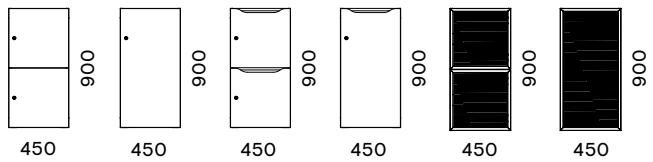

D = 500 mm

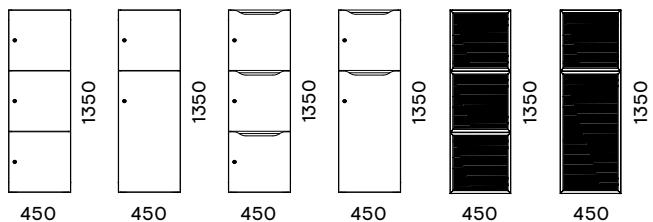


D = 500 mm

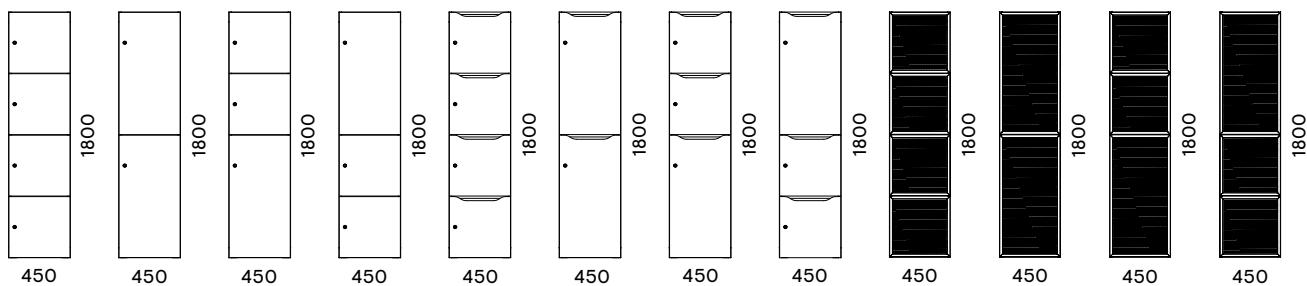

Open wardrobe


D = 500 mm

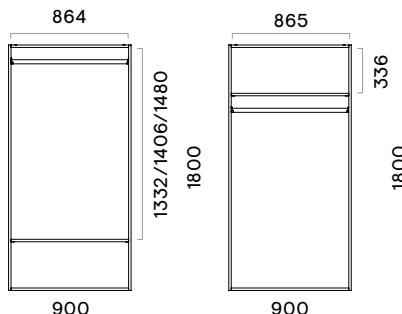

Cabinet with 2 doors and a niche with fabric panels

D = 500 mm

SD = 445 mm



Additional information

Locker columns, wardrobe and cabinet with 2 doors and niche assembling

- Columns have holes in the side walls through which the segments are connected. First of all, you need to calibrate the height of all columns. Make sure that they all are at the same height. Then, you have to fasten the segments with fittings: bushing and screw. If you do not want to connect the columns, or the row has ended and you can see the holes, there are covers included in the package which you can use to hide the holes. Further details on how to connect the cabinet are explained in the assembly instructions. Please, note that only columns with the same height can be connected in the row.
- It is not recommended to place wardrobe and niche on the sides of the combination.




Planter box fixing

- Planter boxes are attached to the top panel with screws. Screws are included in the kit.




Top panel assembly

- When the height of all columns is calibrated and the segments are connected, the top can be assembled. First you need to put the top panel on the columns. Then, fasten it with the wood screws, through the base holes in the column roof. After that, the top will be fixed to the columns.
- The top panels (width and depth) are slightly larger than the measurements of the possible combination of columns. For example, combinations for which a decorative roof is offered can be in these measurements: 450 mm, 900 mm, 1350 mm, and 1800 mm. But the decor panels are 451 mm, 902 mm, 1353 mm and 1804 mm respectively. Thus, there is a 1 mm tolerance to every additional column.

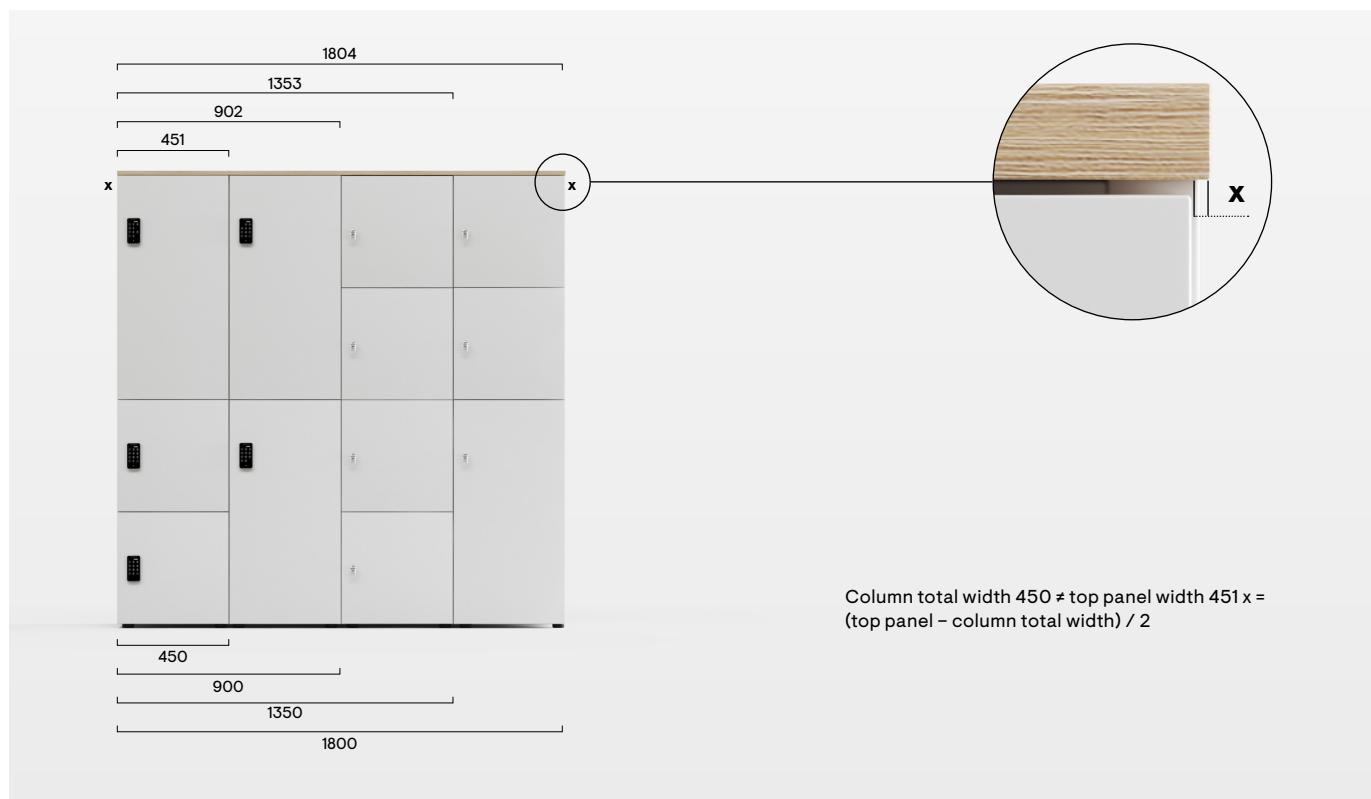


Fabric panels

- If needed, fabric panels can be easily removed and replaced with new ones. They are fixed using screws.

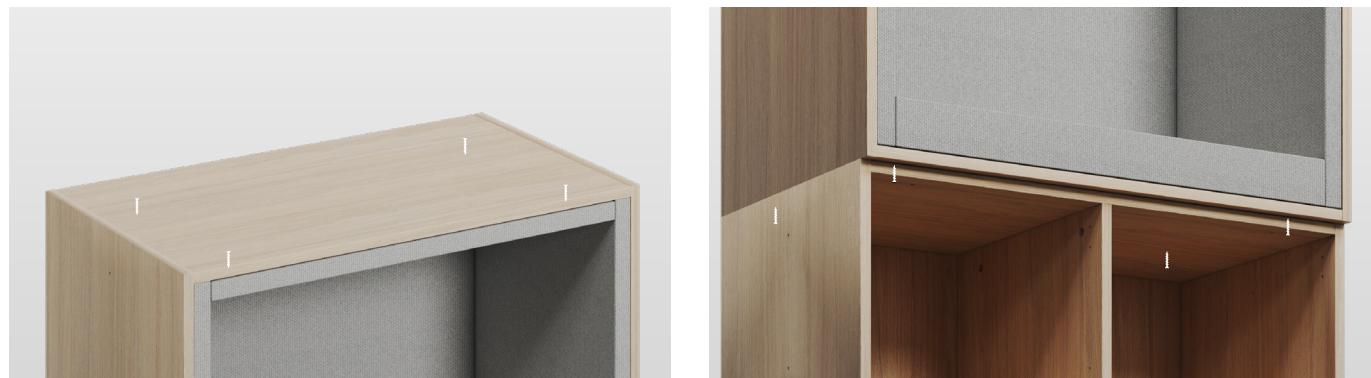

Wardrobe shelving

- The upper shelf is not adjustable, but the lower shelf can be adjusted in three different positions.

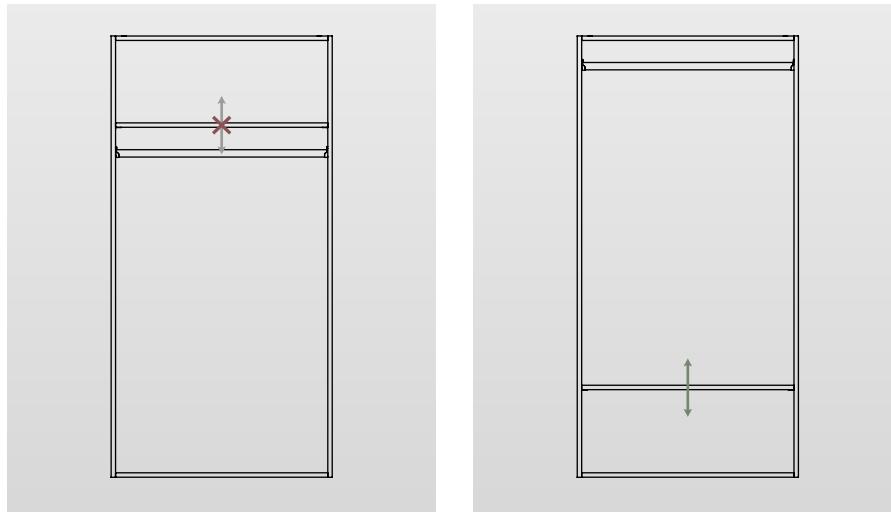


Colour combining for doors

- When ordering lockers with doors, the doors will always be in the same colour and material. However, during assembly it is possible to assemble the locker as needed to attain different colour combinations.



- When ordering assembled lockers, the doors can also be easily removed and changed without any tools. However, it is important that the door lock types match.

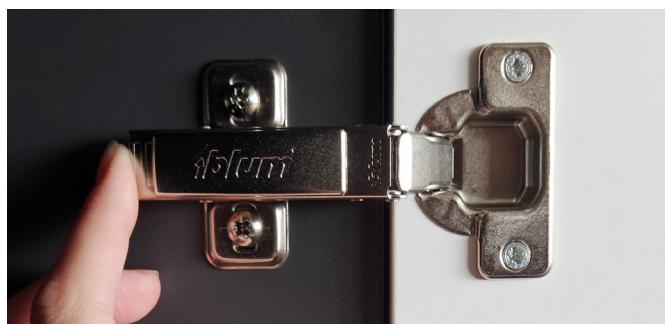

FS lock

- This lock, unlike others, is hidden behind the door and is not visible from the outside. If needed, it is possible to mark the door with an indication where to tap the card. The doors open automatically after holding the card in front of the lock (there is built-in spring-loaded door latch).

Available locks and configurations

Type of lock	Unlocking mechanism	Type of use	Master key	Must be ordered	Optional
	AP	Key	Personal G6F0380 		Master key (G6F0380) Removal key (G6F0403) Cylinder lock with 2 keys (G6F0382)
	BP	Code	Personal G6F0100 G6F0505 		Master key (G6F0100) Programming pin (G6F0505)
	BS	Code	Shared G6F0100		Master key (G6F0100)
	CS	Code	Shared G6F0421 G6F0422 	Manager key (G6F0421): one/two per office Programming key (G6F0422): one per office	
	ES	Code / Card	Personal or shared Card for ES and FS locks, G6F0503	Card for ES and FS locks, G6F0503: two/three as Master and Manager card per office	RFID sticker for ES and FS locks G6F0504
	FS	Card	Personal or shared Card for ES and FS locks, G6F0503	Card for ES and FS locks, G6F0503: two/three as Master and Manager card per office	RFID sticker for ES and FS locks G6F0504 Sticker for doors with FS locks G6F0509 / G6F0510